Ficha Técnica
Technical sheet

BRUMA

Produto | Product

Sistema termostático embutido de banheira com chuveiro de parede Ø250 mm, chuveiro mão Elo e válvula com bica de enchimento para banheira | *Thermostatic concealed bath-shower set with shower head Ø250 mm, Elo handshower set and bath filler with waste and overflow*

184 372 2XX


IMAGEM* | *IMAGE**







DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

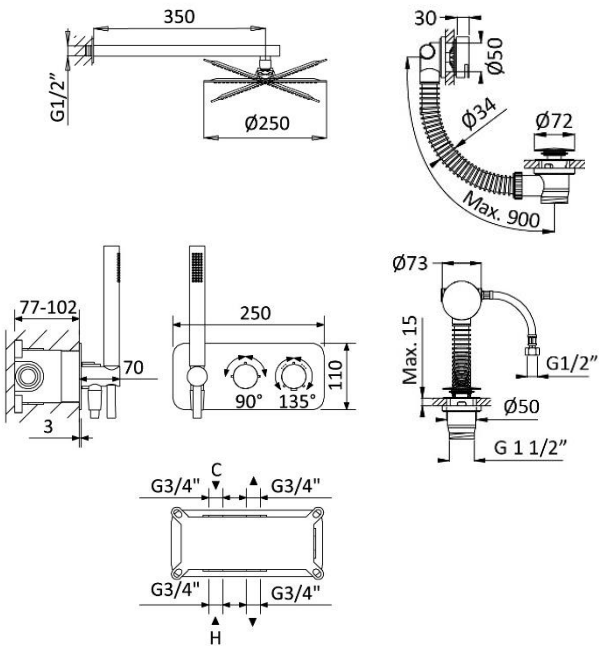

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Sistema termostático embutido de banheira com chuveiro de parede Ø250 mm, chuveiro mão Elo e válvula com bica de enchimento para banheira;
- Cartucho termostático;
- Tecnologia para menor consumo de água BRUMA AirEcoDrop®;
- Sistema anticalcário BRUMA ConfortClean®;
- Chuveiro de mão – Elo e chuveiro de Ø250mm com redutor de caudal 6 l/min;
- Limitador de temperatura a 38°C;
- Com elemento encastrável INT 630 2NO.

- Thermostatic concealed bath-shower set with shower head Ø250 mm, Elo handshower set and bath filler with waste and overflow;
- Thermostatic compact cartridge;
- Water-saving technology BRUMA AirEcoDrop®;
- Anti-limescale system BRUMA ConfortClean®;
- Hand shower – Elo and shower head with flow reducer 6 l/min;
- Safety stop limits the temperature range to 38 °C;
- With concealed body INT 630 2NO.




DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Chuveiro de mão: 6,0 l/min.
- Chuveiro de Ø250 mm: 6,0 l/min.
- Válvula com bica de enchimento: 10,0 l/min.

Flow rate at 3 bar
- Handshower: 6,0 l/min.
- Shower Head Ø250 mm: 6,0 l/min.
- Bath filler with waste and overflow: 10,0 l/min.

EFICIÊNCIA HÍDRICA | *WATER LABEL* **A +**

INSTRUÇÕES DE MANUTENÇÃO | *MAINTENANCE INSTRUCTIONS*

* Imagem não contratual | **Non-contractual image*

Ficha Técnica
Technical sheet


BRUMA

Produto | Product


Elemento encastrável | *Concealed body*

INT 630 2NO

IMAGEM* | *IMAGE**

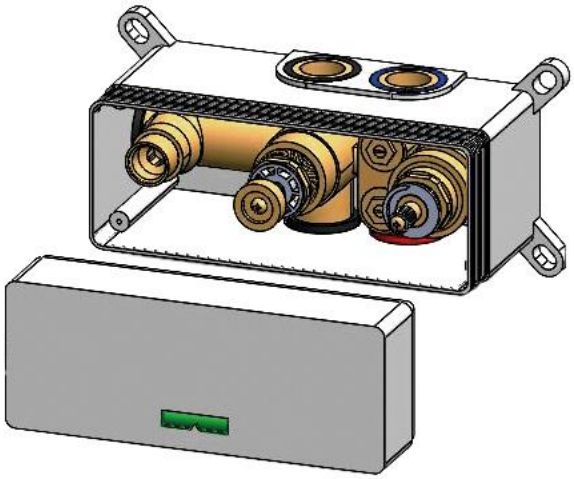

DESENHO DIMENSIONAL | *DIMENSIONAL DRAWING*

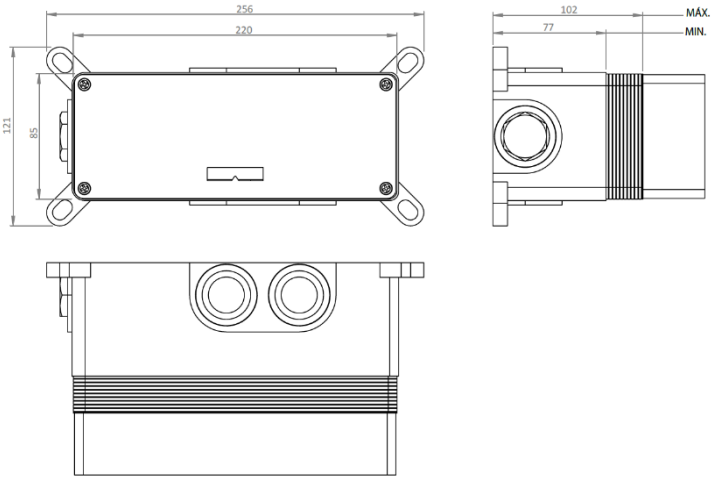

ESPECIFICAÇÕES | *SPECIFICATIONS*

- Elemento encastrável;
- Cartucho termostático com elemento sensível Vernet;
- Cartucho inversor de discos cerâmicos;
- Inclui parafusos e buchas para fixação.

- Concealed body;
- Thermostatic cartridge with Vernet sensitive element;
- diverter cartridge with ceramic discs;
- Screws and plugs included.


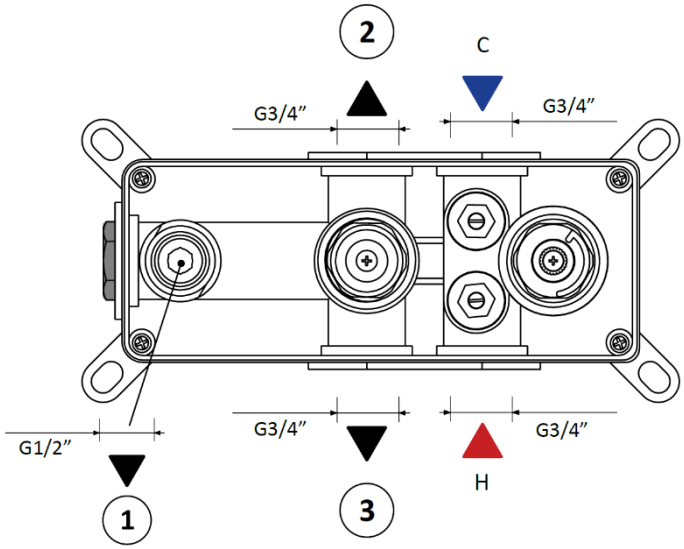


DIAGRAMA CAUDAL | *FLOW DIAGRAM*

Caudais a 3 bar:
- Saída 1 (sem restrição): 26,30 l/min
- Saída 2 (sem restrição): 24,70 l/min
- Saída 3 (sem restrição): 24,70 l/min

Flow rate at 3 bar:
- Outlet 1 (without restrictor): 26,30 l/min
- Outlet 2 (without restrictor): 24,70 l/min
- Outlet 3 (without restrictor): 24,70 l/min

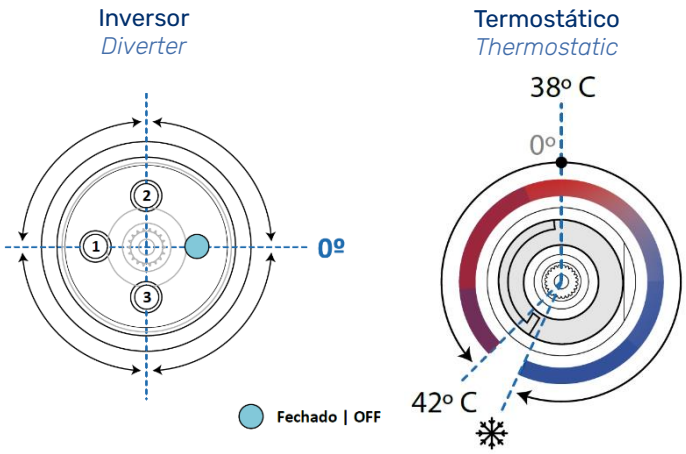

* Imagem não contratual | **Non-contractual image*